


|   | VM30<br>VM50          | VM31<br>VM51 | VM36<br>VM56 | VM38<br>VM58 | VM3136<br>VM5156 | VM3138<br>VM5158 | VM3638<br>VM5658 | VM3836<br>VM5856 |
|---|-----------------------|--------------|--------------|--------------|------------------|------------------|------------------|------------------|
| Standard Seated Lifts                                     | √                     | -            | -            | -            | -                | -                | -                | -                |
| Standard Wheelchair Lifts                                 | -                     | √            | -            | -            | -                | -                | -                | -                |
| Large Wheelchair Lifts                                    | -                     | -            | √            | -            | -                | -                | -                | -                |
| Extra Large Wheelchair Lifts                              | -                     | -            | -            | √            | -                | -                | -                | -                |
| Hybrid Lifts  | -                     | -            | -            | -            | √                | √                | √                | √                |
| 3m Maximum Travel   | VM30                  | VM31         | VM36         | VM38         | VM3136           | VM3138           | VM3638           | VM3836           |
| 3.5m Maximum Travel                                       | VM50                  | VM51         | VM56         | VM58         | VM5156           | VM5158           | VM5658           | VM5856           |
| Internal Width  | A                     | 590          | 740          | 790          | 900              | 740              | 790              | 900              |
| Internal Length - Manual Door                             | B                     | 790          | 1180         | 1230         | 1400             | 1230             | 1400             | 1230             |
| Internal Length - Power Door                              | B                     | N/A          | 1150         | 1200         | 1370             | 1200             | 1370             | 1200             |
| Total External Length with Door Open to Wall              | C                     | 1655         | 2190         | 2290         | 2570             | 2235             | 2405             | 2455             |
| Total External Width Including Floating Platform          | D                     | 722          | 872          | 922          | 1032             | 872              | 922              | 1032             |
| Total External Length Including Floating Platform to Wall | E                     | 1090         | 1475         | 1525         | 1695             | 1525             | 1695             | 1695             |
| Minimum Shaft Width                                       |                       | 846          | 996          | 1046         | 1156             | 996              | 1046             | 1156             |
| Minimum Shaft Length                                      |                       | 1120         | 1505         | 1555         | 1725             | 1555             | 1725             | 1555             |
| Minimum First-Floor Ceiling Height 3m Model               |                       | 2055         |              |              |                  |                  |                  |                  |
|   | 3.5m Model            |              |              |              |                  |                  |                  |                  |
| Mid-Floor Dimensions                                      | 2295                  |              |              |              |                  |                  |                  |                  |
| Safe Working Load   | from 165 mm to 385 mm |              |              |              |                  |                  |                  |                  |
| Lift Speed  | 250kg                 |              |              |              |                  |                  |                  |                  |
| Ramp Gradient   | 60mm per second       |              |              |              |                  |                  |                  |                  |
| Car Control Illumination                                  | 1.8                   |              |              |              |                  |                  |                  |                  |
|   | 5 minutes             |              |              |              |                  |                  |                  |                  |

Dimensions listed above are for guide purposes only.



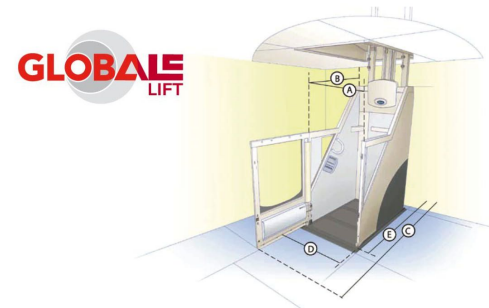

**Design** Designed for safety, flexibility, total freedom and independence.  
Fully compliant to BS5900 : 2012.

**Unobtrusive** Simple and unobtrusive, the Wessex HomeLift's space saving design uses the absolute minimum space in your home.

**Solution** The complete solution:

- Site survey by Wessex Area Sales Manager
- Completion of all electrical and building work
- Installation of lift by Wessex trained personnel
- Commission and demonstration to client
- After sales care - service and maintenance



**Peace of Mind** Wessex fully trained engineers are regionally located at five depots throughout mainland UK. For that total assurance, Wessex engineers are on call 24 hours a day, 365 days a year.

**Options & Accessories** An extensive range of options are available, including seats, keyswitch call stations (for added security), power operated door, in car telephone and many more.

The pump box powers our through-floor lifts. It can be placed indoors or outdoors, and being just 48.5cm tall, 23cm wide and 28cm deep.



Wessex HomeLift.

## Range

The Wessex range of products offers solutions for accessibility suited to your specific requirements.

We can offer you applications suited for internal and external use, with a lifting height of up to 6m and a wide range of options to suit your individual needs.

## Customer Care

Contact our dedicated, friendly team of people, experienced in offering a high level of customer care and individual attention.

Our team can offer advice on everything from feasibility to installation and after care, together with an unparalleled level of technical support.



Other lifts available from the Wessex range



Globale Lift International  
Centrum-Zuid 3023 / 2  
3530 Houthalen-Helchteren  
Contacteer ons [info@globalelift.be](mailto:info@globalelift.be)  
Tel: +32(0)12/26.14.37 • Fax: +32(0)12/23.87.28



## The VM Home Lift



British Design & Manufacture 

Ref: VM00 7502  
© Wessex L  
Language: UK